

Hangcha Europe GmbH

Mariechen-Graulich-Straße 12a,
65439 Flörsheim am Main,
Germany

Administration
Tel: 0049-61453769188
E-mail: admin@hangchaeurope.com

Ansprechpartner für Arbeitsbühnen
Alfred Müller
Mob: 0049-15142453607
E-mail: alfred.mueller@hangchaeurope.com

Technical Support
Thomas Pannke
Mob: 0049-01759284213
E-mail: thomas.pannke@hangchaeurope.com

www.hangchaeurope.com



HANGCHA Group Co., LTD behält sich das Recht vor, Änderungen bezgl. Farbe, Spezifikationen, Ausstattung und sonstige Details, dieser Broschüre ohne Vorankündigung vorzunehmen. Fahrzeugfarben können von den Farben in dieser Broschüre abweichen.

2024 VERSION 1/COPYRIGHT 2024/01



XB Series Pallet Truck With Scissor Lift

The World of Hangcha
SINCE 1956





XB Series Pallet Truck With Scissor Lift Specification

| | | HANGCHA GROUP CO.,LTD. | | | |
|----|--------------------------|------------------------|------------------|------------------|-----------------|
| 01 | Manufacturer | | 2005XB | 1510XB | 1020XB |
| 03 | Rated load | (kg/lb) | 500/1100 | 1000/2200 | 2000/4400 |
| 04 | Platform lift height | (m/in) | 2/78.7 | 1.5/59 | 1/39.4 |
| 05 | Overall length | (m/in) | 1.51/59.4 | 1.51/59.4 | 2.07/81.5 |
| 06 | Overall width | (m/in) | 0.68/26.8 | 0.68/26.8 | 0.8/31.5 |
| 07 | Overall height | (m/in) | 1.2/47.2 | 1.2/47.2 | 1.2/47.2 |
| 08 | Height with rails folded | (m/in) | 0.46/18.1 | 0.43/16.9 | 0.45/17.7 |
| 09 | Platform size | (m/in) | 1×0.68/39.4×26.8 | 1×0.68/39.4×26.8 | 1.5×0.8/59×31.5 |
| 10 | Ground clearance | (m/in) | 0.06/2.4 | 0.06/2.4 | 0.06/2.4 |
| 11 | Turning radius inside | (m/in) | 0 | 0 | 0 |
| 12 | Turning radius outside | (m/in) | 1.45/57 | 1.45/57 | 2.04/80.3 |
| 13 | Batteries | (V,Ah) | 24,70 | 24,70 | 24,100 |
| 14 | Weight ±30 | (kg/lb) | 340/750 | 340/750 | 490/1080 |
| 15 | Travel speed km/h | (mph) | 0~2.8(0~1.74) | 0~2.8(0~1.74) | 0~2.8(0~1.74) |
| 16 | Gradeability | | 6% | 6% | 6% |

Wide applicability

/ Flexible device movement, quick and convenient operation, large loading capacity, high lifting height.

High structural strength

/ High strength rectangular tube, Self-lubricating nylon slider, long service life and stable performance.

High performance

/ Permanent magnet motor, One-piece hydraulic power pack, colloidal maintenance-free battery, high performance, stable and efficient.

Reliability

/ Side support system, one-way throttle valve on lifting hydraulic cylinder, Waterproof connector, safety and reliability in performance.

Safety


/ Three emergency braking functions, emergency reverse button on Joystick, electronic lift limit, ensure the safety of personnel and cargo.

Maintenance convenience

/ The battery is removed from the side of chassis, One piece plastic cover, easy to maintaining.

| XB with lead-acid battery | | |
|---------------------------|-----|-------|
| 1510XB | 24V | 70Ah |
| 2005XB | 24V | 70Ah |
| 1020XB | 24V | 100Ah |

| XBI with lithium battery | | |
|--------------------------|-----|------|
| 1510XBI | 24V | 40Ah |
| 2005XBI | 24V | 40Ah |
| 1020XBI | 24V | 40Ah |

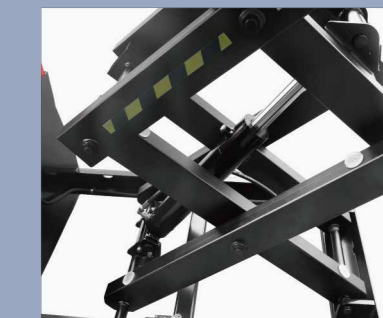

Double scissors structure, rectangular tube profile, more stable and stronger



One-piece cover, covering almost all important components, convenient for maintenance



The batteries can be removed conveniently, for easier maintenance and disassembly



Integrated hydraulic unit, compact structure, less space



Multi-function handle, reliable, beautiful and simple, all functions can be completed with one hand.