



Hangcha Europe GmbH

Mariechen-Graulich-Straße 12a,
65439 Flörsheim am Main,
Germany

Administration
Tel: 0049-61453769188
E-mail: admin@hangchaeurope.com

Sales Management
Thomas Dittrich
Mob: 0049-16096548808
E-mail: thomas.dittrich@hangchaeurope.com

Technical Support
Thomas Pannke
Mob: 0049-01759284213
E-mail: thomas.pannke@hangchaeurope.com

www.hangchaeurope.com

Follow us on Instagram, Facebook, YouTube, App Store, Google Play, and Hangcha Forklift App.

ISO14001, ISO9001, CE, and European Safety Requirements.

HANGCHA Group Co., LTD behält sich das Recht vor, Änderungen bezgl. Farbe, Spezifikationen, Ausstattung und sonstige Details, dierer Bröschüre ohne Vorankündigung vorzunehmen. Fahrzeugfarben können von den Farben in dieser Brochure abweichen.


2023 VERSION 1/COPYRIGHT 2023/06

A Series Storage Assist Vehicle

with capacity of 215kg



INNOVATIVE LITHIUM-ION

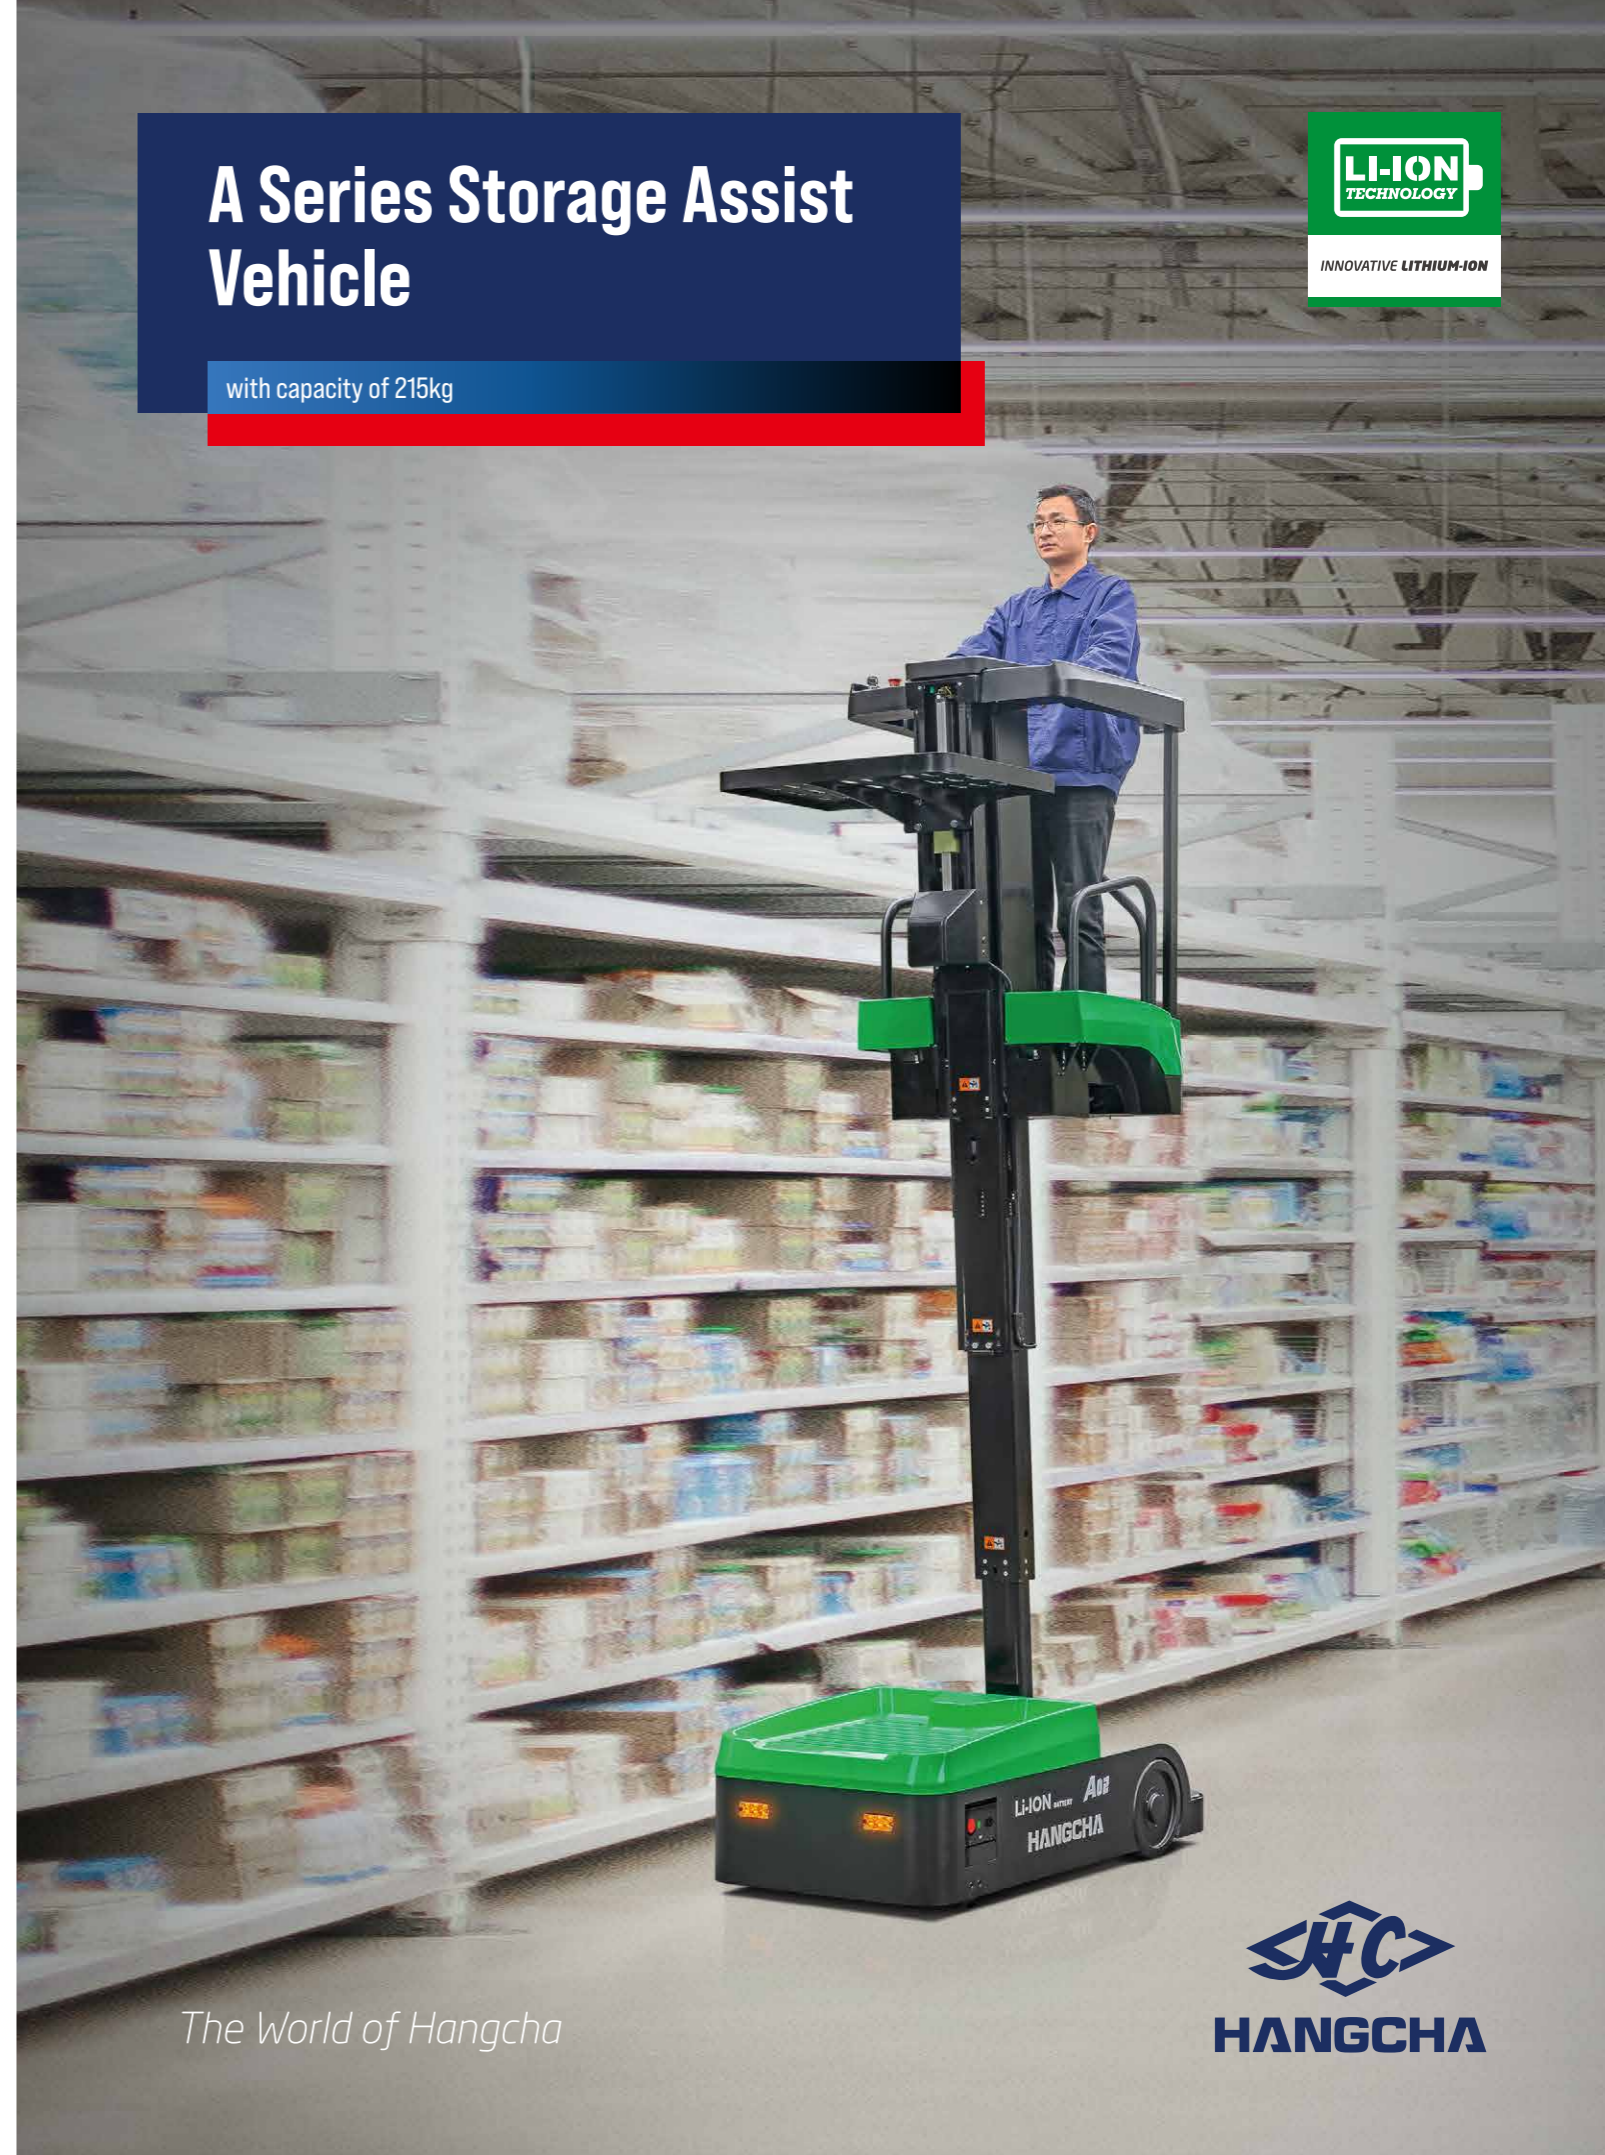

The World of Hangcha



A SERIES STORAGE ASSIST VEHICLE

With a comprehensive safety protection system, excellent ergonomic design, an advanced control system and excellent performance, the vehicle is reliable, stable, comfortable and safe, and may be used for picking, transportation and other operations in narrow, low environments such as small warehouses, supermarkets, laboratories, etc.



SMALL WAREHOUSE



SUPERMARKETS



LABORATORIES

Reliability

- / With a high-strength steel frame structure, the vehicle frame is robust and reliable.
- / All wires and cables have reliable protection, which greatly improves the reliability of the electrical system.
- / Switches, connectors, instruments and other key parts are all of leading international brands and have excellent performance and reliable quality.

High performance

- / A green and environmentally friendly, efficient energy-saving CATL lithium battery is provided for the standard configuration.
- / An integrated charger enables easy and quick charging.
- / For the standard configuration a load tray and platform tray that can be lifted manually/electrically are provided to enable higher picking and transportation efficiency.
- / The maintenance-free brushless AC walking motor has excellent acceleration performance and low heat generation.



The advanced AC control system performs accurate, stable and efficient control.
The CANBUS bus structure makes the communication of the vehicle faster and more reliable.



SIMPLE/SOLID/ SMART



ADDED SECURITY. THE SCIENCE OF DESIGN

Comfort

- / The most ascending and descending buffering function offers more comfort.
- / An optional tray that can be lifted electrically can be operated easily, stably and comfortably.
- / Multi-layer pedal pads and door pads reduce operator fatigue.
- / For the standard configuration, multi-function instruments have multiple functions such as mode selection, wheel position display, etc., and can clearly display various information of the vehicle.



Right and left hand sensing



Front and rear flashing lights

Safety

- / The right and left hand sensing and safety pedal ensure the operator is in the correct operating position.
- / For the standard configuration a tilt switch sensor and a door guardrail sensing switch are provided to improve the operation safety.
- / The driving speed is correlated with lifting height, the higher the lifting height, the lower the driving speed and the correspondingly smaller the acceleration.
- / The turning proportional deceleration function provided for the standard configuration ensures smooth and safe turning.
- / The manual emergency descending function can be performed at the rear of the vehicle.
- / With the operating platform bottom safety protection, front and rear flashing lights and other functions, the surrounding personnel can be alerted and protected, and the driving danger can be reduced.

Maintenance

- / The maintenance-free brushless AC motor significantly reduces the operating cost.
- / The integrated battery display, timer and fault self-diagnosis gauge facilitate maintenance.
- / All components are placed at the front of the frame, so just open the hood, and then the vehicle can be repaired easily and quickly.



A lower operation panel is designed to enable the operations such as operation platform lifting, brake release, etc. to be performed outside the vehicle so as to facilitate vehicle maintenance.

Options

- / Blue light
- / Front working light
- / Side roller
- / Electric lifting pallet
- / Back cushion



A Series Storage Assist Vehicle Specification

Distinguishing mark	1.1	Manufacturer	HANGCHA GROUP CO.,LTD.	
	1.2	Model	CJD02-AMC1-M11*	
	1.5	Rated capacity on load tray	Q1(kg)	100
		Rated capacity on load deck	Q2(kg)	115
Rated capacity on standing platform		Q3(kg)	135	
1.9	Wheelbase	y(mm)	1026	
Weight	2.1	Service weight	kg	600
Tyres/chassis	3.1	Tyres: solid rubber, superelastic, pneumatic, polyurethane	polyurethane	
	3.2	Tyre size, front	mm	Ø210×83
	3.3	Tyre size, rear	mm	Ø280×60
	3.5	Wheels, number driving, caster/loading (x=drive wheels)		1x, /2
Dimensions	4.2	Height, mast lowered	h1(mm)	1414
	4.4	Lift	h2(mm)	2995
	4.5	Height, mast extended	h3(mm)	4409
	4.8	Seat height/standing height	h7(mm)	300
	4.19	Overall length	l1(mm)	1525
	4.21	Overall width	b1/b2(mm)	750/750
4.31	Ground clearance, centre of wheelbase	m2(mm)	40	
4.35	Turning radius	Wa(mm)	1210	
Performance data	5.1	Travel speed, laden/unladen	km/h	8/8
	5.2	Lift speed, laden/unladen	mm/s	260/300
	5.3	Lowering speed, laden/unladen	mm/s	250/250
	5.7	Gradeability, laden/unladen	%	5
5.10	Service brake		Electromagnetic	
Electric-engine	6.1	Drive motor rating S2 60 min	kw	0.65
	6.2	Lift motor rating at S3 15 %	kw	2.2
	6.4	Battery voltage/nominal capacity K3, Maintenance free	V/Ah	24/125
		Type of battery		Lithium
Addition data	10.7	Sound pressure level at the driver's seat	dB(A)	68

Note: * CE model

